



OREON GROW LIGHT 2.2 EXTENDED VOLTAGE

NARROW BEAM

TECHNICAL DATASHEET

VERSION V180901_NB

Product features

Housing material	Aluminium
Finishing	Anodized/ Antifouling powder coating RAL 9010 (dirt repellent)
Optics materials	High transmission glass with AR coating on both sides (transmission >98%)
Radiation angle	120°
Protection degree LED compartment	IP67 (dust- and watertight)
	Lamps can be cleaned by using pressurized water, the complete electrical circuit is sealed waterproof.
Impact resistance housing	IK10
Impact resistance glass	IK07

Technical data


Cos(phi)	> 0.95
Voltage range	200-480 VAC
Current range	3.0A - 1.4A
Frequency range	50/60 Hz
Inrush current	< max. 40A (t< 1 msec)
Leakage current	< 0.75 mA@480VAC
Isolation class	Class I
Connector	Integrated: 3 pole connector Male Green (Wieland RST) Connects to: 3 pole connector Female Green**
Operation conditions	32 to 113°F 0 to 45°C / 95% RH
Storage conditions	32 to 140°F 0 to 60°C / 85% RH

Optical properties

	LB	MB	HB
Light colors			
Photon flux (μMol/s)*	1790	1740	1715
Percentage of blue (% μMol/s)	4.6%	6.5%	9.7%
Wattage (W)	655	640	640
Efficacy (μMol/J)	2.73	2.72	2.68

Other spectrum varieties on request

Lifespan	L90 - 35,000 hours
Electrical and optical properties	
have a tolerance of ± 5%	

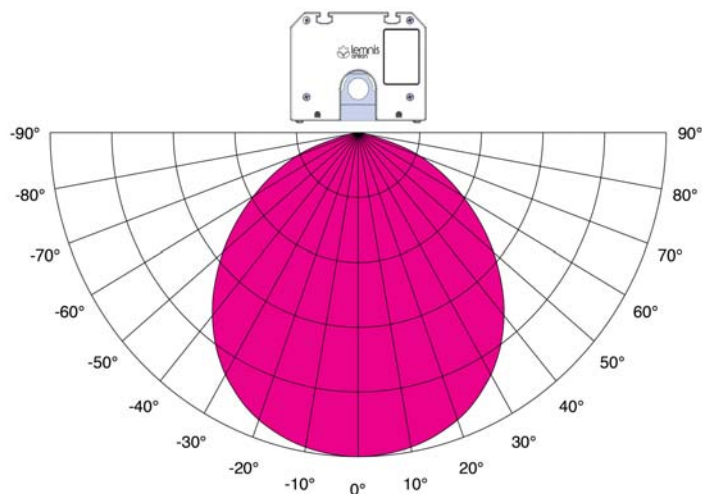

Cooling liquid and circuit

Cooling liquid

Water

Cooling liquid temperature

68 to 95°F | 20 to 35°C

Heat imparted onto cooling system per fixture

LB	MB	HB
<300 W	<295 W	<300 W

Water connection

Pipe thread ISO 228-G 3/4" (2x)

Weight and dimensions

Nett weight

18.3 lb | 8,3 kg

Gross weight (approx.)

22.0 lb | 10 kg (including mounting brackets, connectors, pipes)

Product dimensions (L x W x H)

15.28" x 6.3" x 4.8" | 388 mm x 160 mm x 122 mm

Carton dimensions (L x W x H)

21.65" x 8.66" x 6.89" | 550 mm x 220 mm x 175 mm

Mounting

Fixture mounting interface 4x M6 T-nut (maximum depth for the bolt is 3/8 inch | 10 mm).

The four T-nuts are included in the delivery.

Drawings



Logistic specifications

Quantity per pallet

49 pcs.

Gross weight per pallet

1080.3 lb | 490 kg

Pallet dimensions (EUR)

31.5" x 47.24" x 40.94" | 800 mm x 1200 mm x 1040 mm

Compliance

cMETus listed (ANSI/UL+CSA)

- UL 1598

- CSA C22.2 No. 250.0-08

CE (testing by DEKRA in progress)

- Low Voltage Directive (LVD) 2014/35/EU


- Electromagnetic Compatibility Directive (EMC) 2014/30/EU

General


- Restriction of Hazardous Substances (RoHS) Directive 2011/65/EU

- Eco Design Directive 2009/125/EG




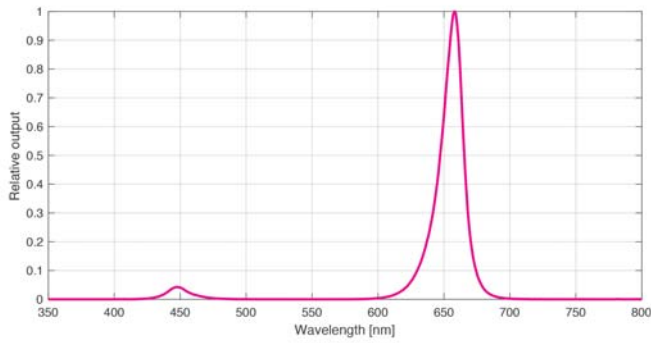


LOW BLUE SPECTRUM

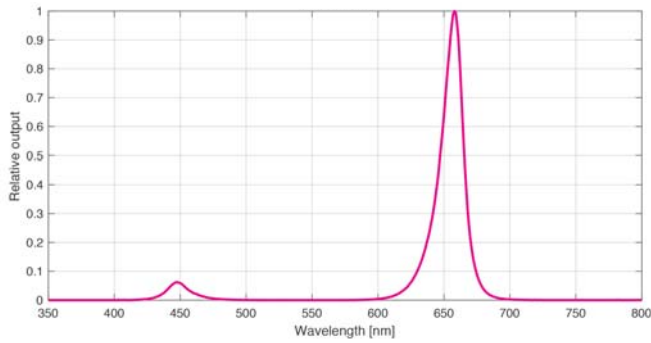

MEDIUM BLUE SPECTRUM

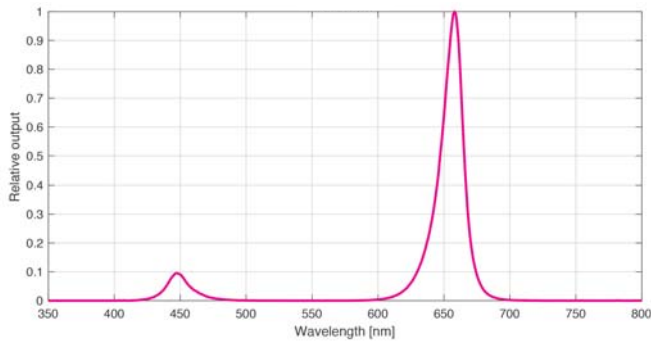

HIGH BLUE SPECTRUM

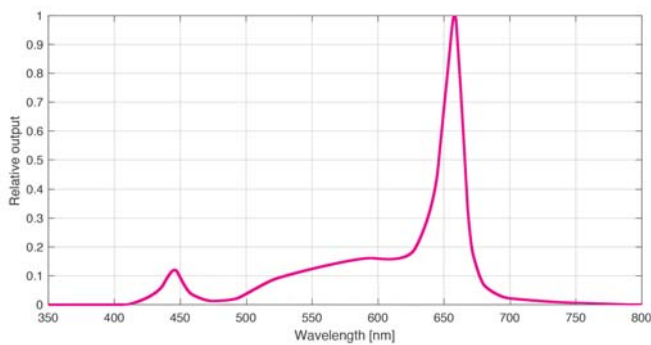

BROAD SPECTRUM

Technical Datasheet

Designed and produced in the Netherlands. © 2018, Oreon. All rights reserved. V180901_NB

Oreon

Lorentzlaan 6
3401 MX IJsselstein
The Netherlands

T +31 (0)30 76 00 660
E info@oreon-led.com
W www.oreon-led.com

